

Heavy Duty Transmission Oil Filler & Extractor with 8pc Adaptor Set

Part Number: WKZ-VAS572001

Thank you for purchasing a our product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.

INTRODUCTION

This tool is designed for filling & removing fluid in transmissions and differentials.

WARNING

- Not to be used with volatile liquids (petrol, diesel etc)
- Keep away from fire
- Wear suitable safety equipment when operating this equipment.

ATTACHMENTS


1		FORD 1/8 - 27 (NPT)
2		UNIVERSAL BMW, HONDA, NISSAN
3		VW/AUDI & SKODA
4		VW/AUDI & PORSCHE
5		VW/AUDI, MINI COOPER M10 X 1.0
6		VW/AUDI DSG M24 X 1.5
7		VW/AUDI CVT M22 X 1.5
8		MERCEDES M12 X 1.5

SPECIFICATION




Capacity: 7.5L
Viscosity Range: Up to SAE 140
Output capacity: 80cc/ Cycle


OPERATING

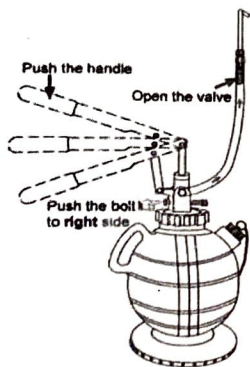


Open the valve and push the flow control bolt to the Right, and pump handle to commence filling.

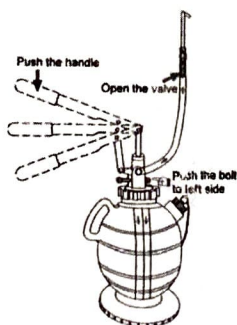

When the handle becomes hard to pump, the fluid is almost full. Push the flow control bolt to the **Left** side and slowly finish dispensing.

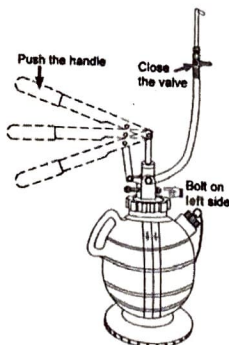

When finished, close the valve as shown in the above diagram.

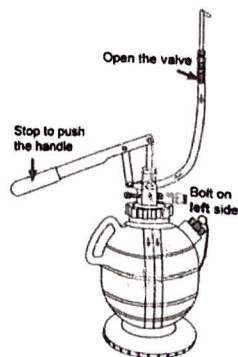

Remove attachment from transmission and elevate the hose higher than the tank. Open the valve, and let any remaining oil return to the tank.

WARNING: Please read these instructions carefully. Note the safe operational requirements, warnings and cautions. Use the product correctly and with care for the purpose for which it is intended. Failure to do so may cause damage and or personal injury and will invalidate the warranty. Please keep instructions safe for future use.